

T3RRA



5.3 | Field Surveying

October 2026

Contents


5.3 | Field Surveying

5.3 | Field Surveying

When you enter surveying you will be in Field surveying mode (except in T3RRA Ditch where Drain survey mode is the default). Points that are collected in field survey mode are shown on the map as circles.

We do not require you to collect a field boundary when surveying. Some do consider it best practice to drive the perimeter of a field regardless, collecting elevation points as they go.

When surveying fields travel slowly across the field to ensure that plenty of data is recorded for an accurate representation in later stages.

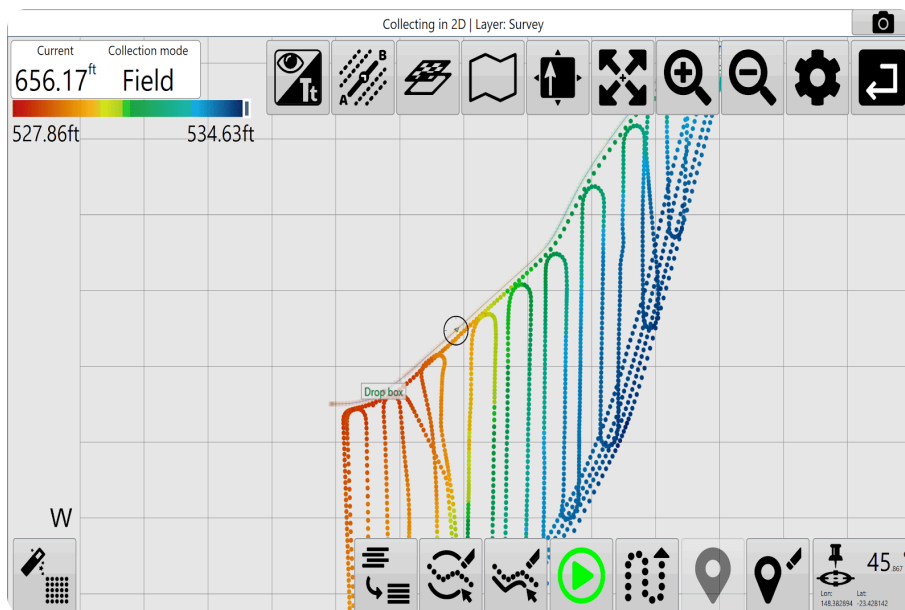

We recommend between 30-50 feet (9-15 metres) between survey passes to ensure that enough information is gathered. The “best” spacing is dependent on the specifics of the work being done. The wider the swath that is taken the less information that is gathered.

Collected points can be deleted using the two available methods:

- Delete in a circle.
- Delete points in line.

Markers can also be placed and deleted.